



eco


framek
door solutions



We are sure you feel the same as we do when it comes to our environment, but with the demands of our market place it can prove hard to find products that provide outstanding specification as well as being kind to our environment. However, Framek have a solution...

This is a range of FSC certified products. Providing a solution to projects requiring the specification of a durable, fully finished, quality interior door, with all the attractive characteristics of the conventional veneers. In addition, Framek can meet building regulations and sustainable criteria to meet the demands of modern environmental build legislation.

- ▶ FSC approved
- ▶ Available in FD30
- ▶ Give the appearance of a conventional door
- ▶ Available in 6 woodgrain finishes
- ▶ Consistant finish ideal for pairs or doors in close proximity

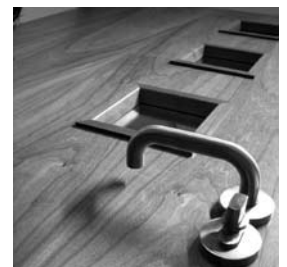

► Performance

Framek provides a new kind of finish, with outstanding durability, excellent face resistance and easy cleaning properties. Eco incorporates the use of CPL (Continuous Pressure Laminates) which offers higher protection against both physical and chemical damage making them ideal for heavy duty areas such as apartment entrance doors and are not affected by sunlight.

► Maintenance

Impact of non-metallic objects should not damage the surface although this is not guaranteed. Installers should finish the door edges with a chamfer, lightly sand the lipped edge and apply 2 coats of satin varnish. Minor scratches may be repaired with coloured wax. The 'magic man' and 'plastic surgeon' may also be helpful in achieving damage limitation.



By buying products with the FSC label you are supporting the growth of responsible forest management worldwide

SW - COC - 2078 © 1996 Forest Stewardship Council A.C.

► Technical Performance Standard

Abrasion

CPL to fulfil stage 1, more than 50 cycles abrasion. Scratch Resistance Requested against the standard 2.0N. CPL = 3.0 – 4.0N.

Steam

It is allowed from the standard to get a decreasing of the gloss grade. CPL: No or minimum decreasing of the gloss grade.


Splitting

The standard allows a splitting of the laminate during the test. CPL does not split during the test.

► Conclusion

Framek has a durable surface with good abrasion resistant properties. The consistency of colour and grain of the laminate eliminates the added cost of selection that occurs with natural veneer.

► Finishes

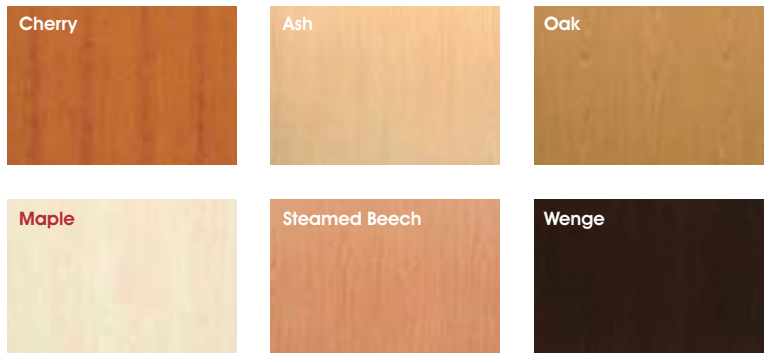

framek

door solutions

For any specific requirements please do not hesitate to contact our Sales team.

Sales Tel: +44 (0) 870 4584416

Fax: +44 (0) 870 4584417

www.framek.co.uk

Framek Limited, Unit 19 Cannon Business Park,
Darkhouse Lane, Coseley, West Midlands
WV14 8XQ

